

20W

UL/cUL Listed LED Flood Light

Applications:


Outdoor flood lighting, Building decoration lighting, Industrial lighting, Advertising lighting and Road lighting



Item Code: FLA201-DLC	Parameter Range
Power	20W
LED Quantity	25PCS SSSH3030 SMD LED
Color	Cool White
CCT	5700K
CRI	≥75
Life-Span	≥50,000 Hours
Flux	2,000+/-100LM
Beam Angle	60°/ 120°
LED Manufacturer	Epistar
Material	Aluminum + Toughened glass
Net Weight	MAX 1KG/PC
Gross Weight	MAX 1.2KG/PC
Inner Box Dimension	23*19*14.5CM
Outer Carton Dimension	59.5*48*32CM
Package Spec.	12PCS/CTN,16.5KG/CTN



Distributed by:

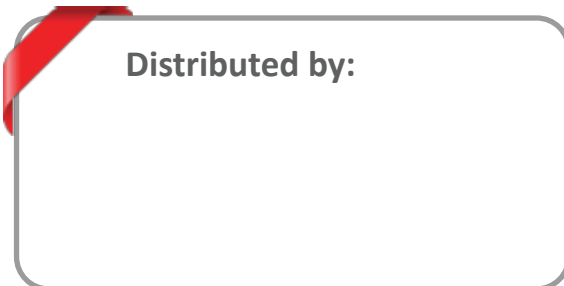

20W

UL/cUL Listed LED Flood Light



Features:


- ✓ High efficiency and energy saving of more than 80%
- ✓ Ultra-high brightness
- ✓ High color-rendering index
- ✓ Long life $\geq 50,000$ hours

Technical Request:


Item	Units	Parameter range
Working Environment	$^{\circ}\text{C}$	$-37^{\circ}\text{C} - 55^{\circ}\text{C}$
Working Humidity		$\leq 95\%$
Storage Condition	$^{\circ}\text{C}$	$-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
Limited Voltage	V	100-277VAC 50/60Hz
Input Current	A	0.07-0.20
Protection Level		IP65(Outdoor using)

Dimension:

FLA201-DLC



Dimension (mm)

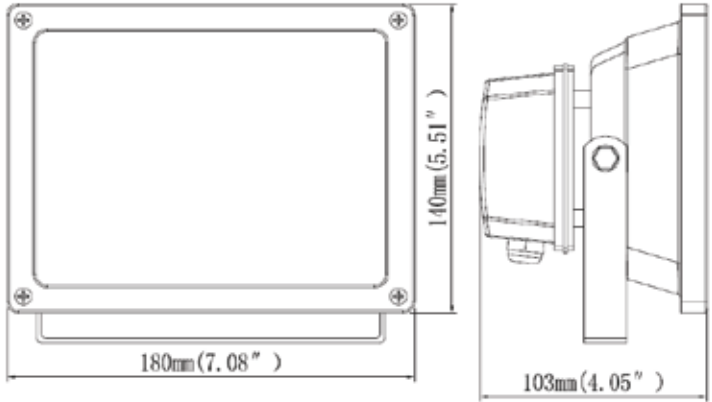

IP65 c us

LISTED