



**Applications:**

Outdoor flood lighting, Building decoration lighting, Industrial lighting, Advertising lighting and Road lighting



Item	Parameter range
Power	210W(Meanwell)
Operating Voltage	100-277VAC 50/60Hz
LED Quantity	96PCS USA CREE SMD
Color	Cool white
CCT	5700-6500K
CRI	≥75
Life-span	≥50,000 Hours
Flux	20,000 +/- 100LM
Beam Angle	60°/ 120°
Material	Aluminum + Toughened glass
Net Weight	MAX 9.3KG/PC
Gross Weight	MAX 10KG/PC
Inner Box Dimension	51*37.2*23.6CM
Outer Carton Dimension	53.2*38.9*50.2CM
Package Spec.	2PCS/CTN,22KG/CTN



Distributed by:

# 210W LED Flood Light



## Features:


- ✓ High efficiency and energy saving of more than 80%
- ✓ Ultra-high brightness
- ✓ High color-rendering index
- ✓ Long life  $\geq 50,000$  hours

## Technical Request:


Item	Units	Parameter range
Working Environment	°C	-37°C - 55°C
Working Humidity		$\leq 95\%$
Storage Condition	°C	-40°C~80°C
Limited Voltage	V	100-277VAC 50/60Hz
Input Current	A	0.54-1.50
Protection Level	IP65(Outdoor using)	

## Dimension:

**210W**



**Dimension (mm)**

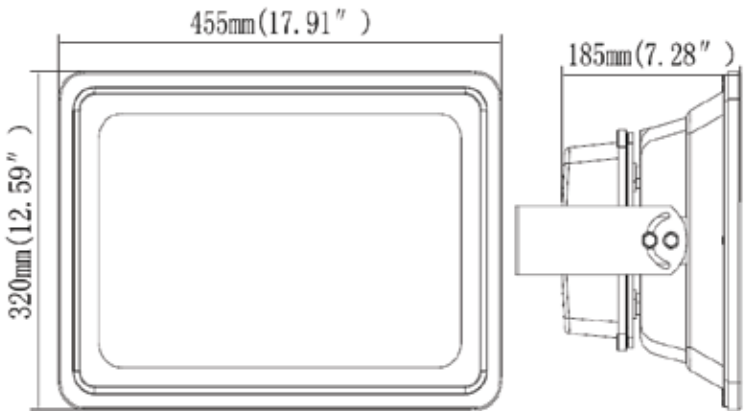

IP65 c 