



# 50W

## UL/cUL Listed LED Flood Light




### Applications:

Outdoor flood lighting, Building decoration lighting, Industrial lighting, Advertising lighting and Road lighting

Item Code: FLA501-DLC	Parameter Range
Power	50W
LED Quantity	60PCS S5HS3030 SMD LED
Color	Cool White
CCT	5700K
CRI	≥75
Life-Span	≥50,000 Hours
Flux	5000+/- 100LM
Beam Angle	60°/ 120°
LED Manufacturer	Epistar
Material	Aluminum + Toughened glass
Net Weight	MAX 2.7KG/PC
Gross Weight	MAX 2.9KG/PC
Inner Box Dimension	27*23.8*17.5CM
Outer Carton Dimension	56.5*49.6*38CM
Package Spec.	8PCS/CTN,19.5KG/CTN



Distributed by:

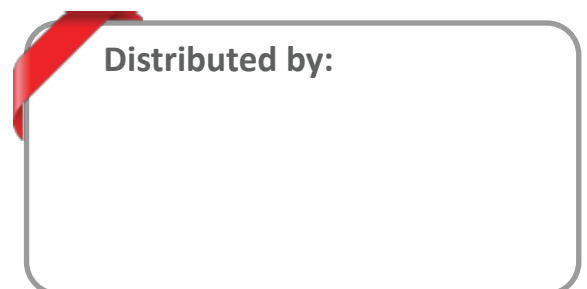

# 50W

## UL/cUL Listed LED Flood Light



### Features:


- ✓ High efficiency and energy saving of more than 80%
- ✓ Ultra-high brightness
- ✓ High color-rendering index
- ✓ Long life  $\geq 50,000$  hours

### Technical Request:


Item	Units	Parameter range
Working Environment	$^{\circ}\text{C}$	$-37^{\circ}\text{C} - 55^{\circ}\text{C}$
Working Humidity		$\leq 95\%$
Storage Condition	$^{\circ}\text{C}$	$-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
Limited Voltage	V	100-277VAC 50/60Hz
Input Current	A	0.10-0.30
Protection Level		IP65(Outdoor using)


### Dimension:

**FLA501-DLC**



**Dimension (mm)**

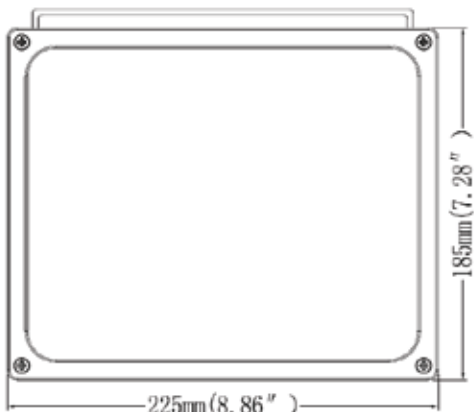

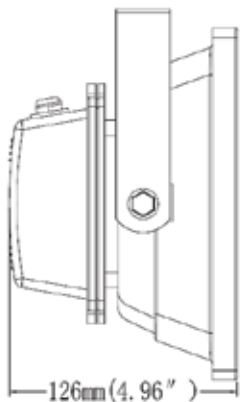

IP65 cUL us LISTED 