


Commercial Duty

Bronze Line

All Bronze Line HD commercial fans are complete with corrosion resistant epoxy-coated metal blades.

save

50% of your cooling cost ^{up to}
30% of your heating cost

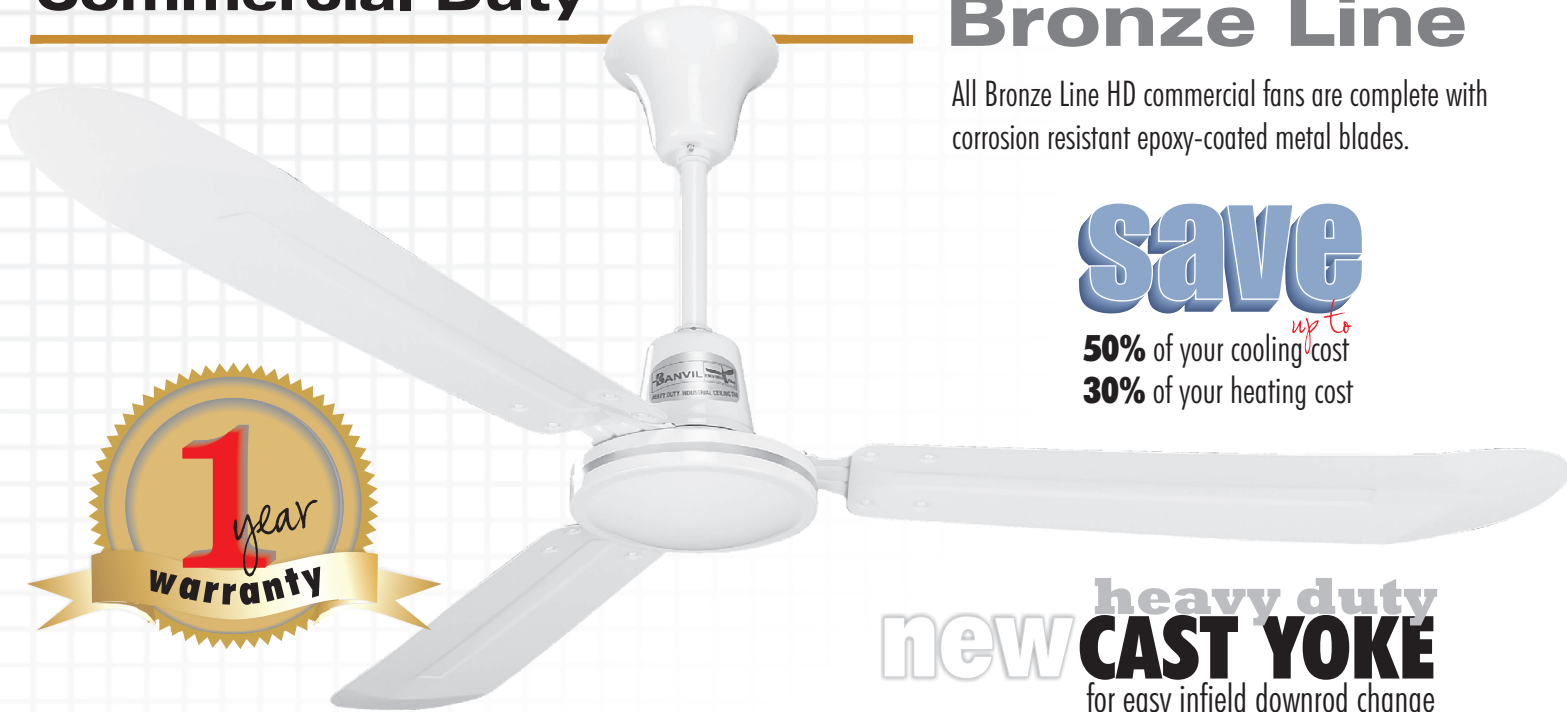

new heavy duty **CAST YOKE**
for easy infield downrod change

| Model | FP36 | FP36R | FP36R-5W | FP48 | FP48R | FP48R-5W | FP56 | FP56-36** | FP56R | FP56R-36** |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| Safety Cable | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" |
| Cord/Lead Wire | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" | 60" |
| Diameter Sweep | 36" | 36" | 36" | 48" | 48" | 48" | 56" | 56" | 56" | 56" |
| CFM | 10,500 | 10,500 | 10,500 | 18,000 | 18,000 | 18,000 | 22,000 | 22,000 | 22,000 | 22,000 |
| Area (sq.ft.) | 700 | 700 | 700 | 1,400 | 1,400 | 1,400 | 1,700 | 1,700 | 1,700 | 1,700 |
| Velocity (ft/m) | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |
| Volts | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 |
| Amps | 0.35 | 0.35 | 0.35 | 0.50 | 0.50 | 0.50 | 0.55 | 0.55 | 0.55 | 0.55 |
| Watts | 40 | 40 | 40 | 50 | 50 | 50 | 65 | 65 | 65 | 65 |
| RPM (max) | 360 | 360 | 360 | 320 | 320 | 320 | 280 | 280 | 280 | 280 |
| Wiring | plug-in | 3+ground | 4+ground* | plug-in | 3+ground | 4+ground* | plug-in | plug-in | 3+ground | 3+ground |
| Airflow | down only | up & down | up & down | down only | up & down | up & down | down only | down only | up & down | up & down |
| Weight | 9 lbs | 9 lbs | 9 lbs | 11 lbs | 11 lbs | 11 lbs | 13 lbs | 13 lbs | 13 lbs | 14 lbs |



ideal for commercial use

*requires 106FR 5amp reversing control

**with 36" downrod

all Bronze models are curved tip

Bronze features

- Downrod diameter 7/8" eg E962-36
- Corrosion-resistant epoxy prime and finish coat on all metal housing & blades
The aerodynamically curved-tip blade results in maximum air delivery.
- All metal, no plastic.
- Permanent lubricated sealed TPI ball bearings.
- Totally enclosed impedance protected motor. Non-polar, extra heavy duty capacitor.
- Use solid state infinite speed motor controls or church quiet control (WC103)
- Heavy cast yoke for easy infield downrod change.
- Customized downrod lengths over 36" available.
Also 16' cord with plug part# Cord-Wh16.
- For church quiet control use WC103 Control for one fan only

